


## EXTENDABLE MID-MOUNT SNOWFOE™ SERIES

**Henderson**

In your search for a wing that is easy to operate and easy to see, the Henderson Extendable Wing is the perfect choice. Whether you are just trying your first wing system or have a fleet of professional wing operators, the fact that this wing takes up less chassis frame rail and tucks back with less clearance issues is a

welcomed change. This is a simple effective addition to extend the reach of your plow truck gets in each pass. Do more with less is the theme of this wing as another great product from...

*The Dependable Ones*

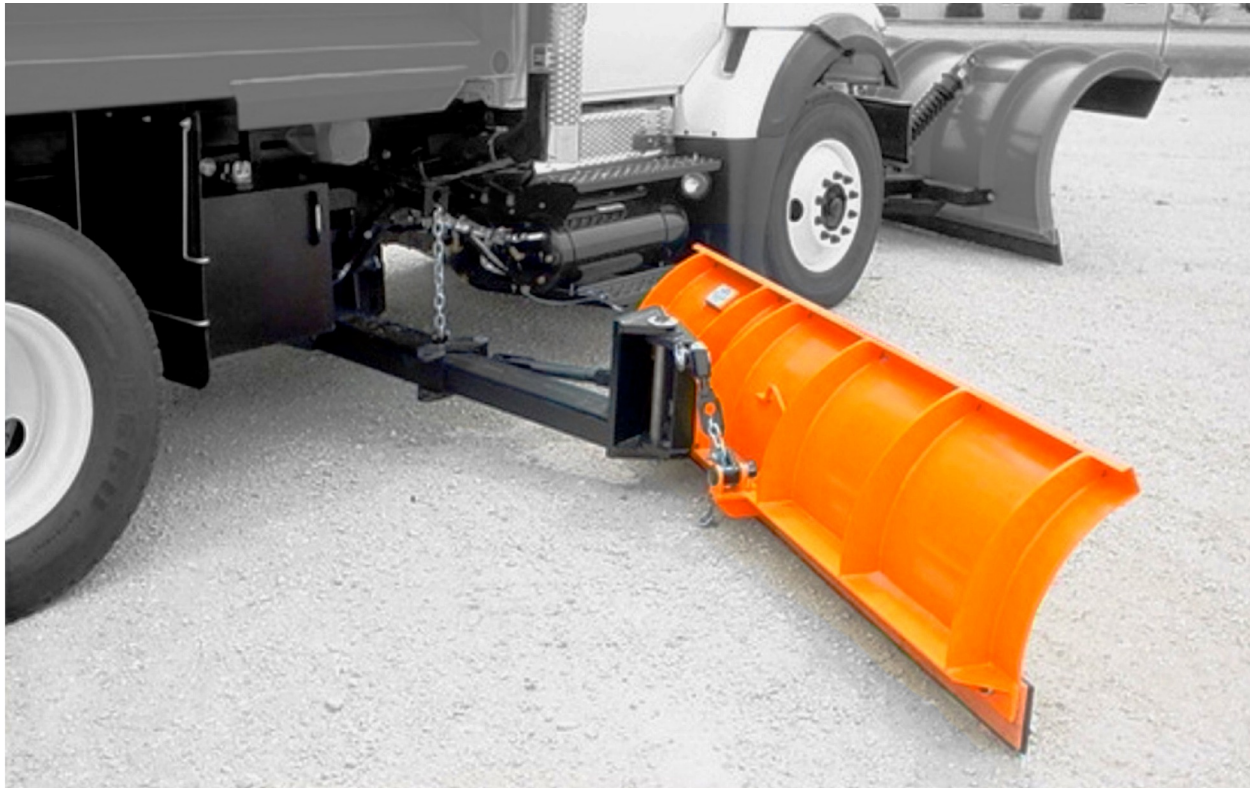

- Better weight distribution lets the drive wheels carry the load which prevents overloading on lighter weight front axles.
- Can be viewed from the side mirror for better driver visibility. Eliminates blind spots associated with front mount mast.
- Easy access to the passenger door, plow up or down.
- Chain adjustable floats follows the contour of the road for a cleaner sweep.
- Dump body can be raised and lowered with the moldboard in the carry position so there is great flexibility for sanding, salting and stockpiling.
- Entirely hydraulically operated for total cab control.
- Available in 8' x 23" to clear under mailboxes.
- Can be installed on any truck with at least 84" cab-to-axle and tucks in close.
- Eliminates conventional slide for less binding when raised and lowered.
- Moldboard is high pressure cleaned and degreased with phosphate solution before powder coat Highway orange paint. Mounting components are powder coat painted black.

## FEATURES & SPECIFICATIONS

Plow Model	HEW-8'
Overall moldboard length	8'
Overall moldboard height @ 45°	23"
Moldboard thickness	10 ga grade 50
Cutting edge (AASHO Punched)	1/2" x 6"x 8'
Additional path cleared	64"-72"
Weight of wing only	430 lbs
Weight of wing and mounting (approx.)	1080 lbs



Unit tucks straight back for minimal interference, leaves room on body for ladders, shovel holders, tarp hooks, etc...



Extension cylinder mounted inside the cross tube for protection from road debris. Lift arm design eliminates slide construction which can bind.

## SPECIFICATIONS

### MOLDBOARD

- 10GA GR50 moldboard with 6—1/2" one-piece flame cut ribs
- Continuous welded moldboard
- Gusseted 4" x 4" x 1/2" bottom angle
- Moldboard is high pressure cleaned and degreased with phosphate solution before powder coat Highway orange paint. (mild steel units only) Mounting components are powder coat painted black.

### MOUNTING HARDWARE

- 7" x 5" outer cross tube
- 6" x 4" wall inner cross tube
- 1/2" x 2' cheek plates

### UNITIZED CONSTRUCTION

All components are continuous welded for maximum strength to give the plow a "unitized" architecture and to reduce corrosion. The Henderson SNOWFOE Series will be on the road long after others have packed up and gone home. And that will help keep your budget in line.

## OPTIONS

- Carbide Cutting Edge
- Curb Guard
- Moldboard Wear Shoe

### HENDERSON MANUFACTURING ALSO PROUDLY OFFERS THESE INNOVATIVE PRODUCTS:

- Patrol Wing
- Reversible Plow
- One-Way Plow
- Mid-mount Wing
- Leveling Wing
- V-Box Sand and Salt Spreaders
- Pickup Sand and Salt Spreaders
- Tailgate Sand and Salt Spreaders
- Pre-Wet Systems
- Full line of Mark Series Dump Bodies for single and tandem axel trucks
- Munibody™ combination dump/spreader bodies
- Anti-icing Systems



P.O. Box 40 · Manchester, Iowa 52057  
800-359-4970 · [www.henderson-mfg.com](http://www.henderson-mfg.com)

©2006 Henderson Mfg. Litho in USA · Henderson Mfg. reserves the right in Pursuit of continuous product improvement to change specifications used herein.